

EXAMPLES OF LARGE EQUATIONS:

$$M_a = A_s f_s \cdot jd \quad \text{where} \quad jd = \left[\int_0^c z \sigma_u(z) dz \right] / \left[\int_0^c \sigma_u(z) dz \right] + d - c \quad (1)$$

$$\begin{aligned} f_{b,O} &= \left[\left(0.4 + \frac{c}{d_b} \right) \frac{l_s}{d_b} + 16.6 + 0.10 \frac{A_{tr} f_{yt} l_s}{s_{tr} d_b^2 n} \right] \sqrt{f'_c} \quad (\text{MPa}) \\ &= \left[\left(4.8 + 12 \frac{c}{d_b} \right) \frac{l_s}{d_b} + 200 + \frac{A_{tr} f_{yt} l_s}{125 s_{tr} d_b^2 n} \right] \sqrt{f'_c} \quad (\text{psi}) \end{aligned} \quad (2)$$

$$f(\varphi) = \begin{cases} 0 & 0.0 \leq \varphi \leq 0.50 \\ 100 \times \varphi - 50 & 0.50 \leq \varphi \leq 0.51 \\ 1 & 0.51 \leq \varphi \leq 0.65 \\ 53,566 \times \varphi^3 - 109.38 \times \varphi^2 + 68,158 \times \varphi - 11,801 & 0.65 \leq \varphi \leq 0.85 \\ 0 & 0.85 \leq \varphi \leq 1.0 \end{cases} \quad (10)$$

$$\begin{aligned} \theta_p^N &= (\delta_u - \delta_e) + \left(\frac{1}{2} + \frac{\lambda' - 1}{\lambda} \right) \left(\frac{L_b}{3EI_b} \right) M^R + \left(\frac{L_r}{L_b} \right) (\delta_u - \delta_e) \\ &\geq \theta_p^S + \left(\frac{L_r}{L_b} \right) \left[(\delta_i^S + \delta_e) - \delta_e \right] \end{aligned} \quad (9b)$$

$$\begin{aligned} \theta_p^N &= (\delta_u - \delta_e) + \left(\frac{L_b}{6EI_b} \right) \left(\frac{L_b}{L_b''} \right) M^R + \left(\frac{L_r}{L_b'} \right) (\delta_u - \delta_e) + \left(\frac{L_b - L_b'}{L_b'} \right) (\delta_u - \delta_e) \\ &= (\delta_u - \delta_e) \left(\frac{L_b + L_r}{L_b'} \right) + \left(\frac{L_b}{6EI_b} \right) \left(\frac{L_b}{L_b''} \right) M^R \geq \theta_{p,min} \end{aligned} \quad (11b)$$

EXAMPLES OF SMALL TABLES:

Table 1—Average values of concrete properties

Test	Age at testing, days	f_c , MPa (psi)	f_{ct} , MPa (psi)	E_c , MPa (ksi)
SR2	37	43.1 (6250)	2.8 (410)	31,000 (4490)
SR3	79	50.6 (7340)	3.0 (440)	31,900 (4630)
SR4	102	47.5 (6900)	2.6 (370)	33,100 (4790)
SR5	107	47.6 (6910)	2.6 (380)	33,100 (4800)
SR6	288	52.7 (7640)	3.3 (480)	33,600 (4880)
SR7	291	49.1 (7120)	3.2 (460)	32,600 (4730)
SR8	299	49.2 (7130)	3.2 (460)	32,600 (4730)
SR9	311	52.8 (7660)	3.3 (480)	33,800 (4900)
SR10	95	42.4 (6150)	2.5 (360)	31,700 (4590)
SR11	106	42.9 (6220)	2.7 (390)	31,800 (4620)
SR12	121	43.5 (6310)	2.9 (420)	32,100 (4650)

Table 2—Average values of flexural reinforcement properties

Test	SR2 to SR9	SR10 to SR12
d_b , mm (in.)	16 (0.63)	16 (0.63)
f_y , MPa (psi)	530 (76.9)*	523 (75.9)
f_u , MPa (psi)	600 (87.0)	621 (90.1)
ε_u , %	5.52	10.6
f_u / f_y	1.13	1.19
Type	Cold-worked	Hot-rolled

*Yield strength at 0.2% plastic strain.

Table 3—Test results

Spec. ID	f_c , psi (standard deviation, psi)	P_{peak} , kip	Δ_{peak} , in.	Δ_u , in.	$\varepsilon_{bar,peak}$, $\mu\epsilon$	$P_{bar,peak}$, kip	$\frac{P_{peak} - P_{bar,peak}}{f_c A_c}$, %	$\frac{P_{bar,peak}}{P_{peak}}$, %
S-16	5413 (352)	2818	0.262	0.357	1800	328	80.9	11.6
A-12	6340 (307)	3425	0.308	0.322	2890	109	90.9	3.2
B-12	5885 (345)	2911	0.286	0.320	2070	83.2	84.1	2.9
A-3	5236 (204)	2681	0.319	0.529	3000	113	86.7	4.2
B-3	4763 (295)	2417	0.285	0.561	2650	106	84.5	4.4

Note: 1 psi = 0.006895 MPa; 1 kip = 0.004448 kN; 1 in. = 25.4 mm.

EXAMPLES OF LARGE TABLES:

Table 2—Diffusion coefficients from theoretical approaches

Mixture ID	Diffusion coefficients, m ² /sec (ft ² /sec) × 10 ⁻¹²		
	Nernst-Plank	Nernst-Einstein	Zhang-Gjorv
100 TI	2.4 (25.7)	2.7(29.4)	4.7 (50.4)
100 TIP	1.9 (20.0)	2.1 (22.9)	3.7 (39.4)
60TI/20C/20F2	2.8 (30.4)	3.2 (34.8)	5.5 (58.6)
60TI/20F/20F2	2.5 (27.1)	2.9 (31.0)	4.9 (53.2)
75TI/20F/5SF	0.7 (8.1)	0.9 (9.3)	1.5 (15.9)
75TI/20F/5M	1.0 (10.9)	1.1 (12.5)	2.0 (21.4)
60TI/20F2/20G120S	1.4 (14.6)	1.5 (16.7)	2.7 (28.7)
75TI/20F2/5M	1.3 (14.1)	1.5 (16.1)	2.6 (27.7)
65TI/30F2/5SF	0.7 (7.9)	0.8 (9.1)	1.5 (15.7)
67TI/30F2/3SF	1.2 (13.0)	1.4 (14.8)	2.4 (25.6)
65TIP/35G120S	1.1 (12.2)	1.3 (13.9)	2.2 (23.9)
75TISM/25C	2.1 (22.5)	2.4 (25.7)	4.1 (44.1)
75TISM/25F2	1.6 (17.8)	1.9 (20.2)	3.2 (34.8)
97TISM/3SF	0.6 (6.7)	0.7 (7.5)	1.2 (13.0)
60TI/30F/10F2	2.5 (26.8)	2.8 (30.5)	4.9 (52.5)
77TI/20F/3SF	1.5 (16.5)	1.7 (18.7)	3.0 (32.3)
60TI/30C/10F2	2.7 (28.6)	3.0 (32.7)	5.2 (56.3)
60TI/30C/10F	2.9 (31.7)	3.4 (36.3)	5.8 (62.2)
80TI/20C	2.6 (28.7)	3.0 (32.7)	5.2 (56.3)
62 TI/35G120S/3SF	0.6 (6.9)	0.7 (7.9)	1.3 (13.6)
60TI/35G120S/5M	0.6 (6.3)	0.7 (7.3)	1.2 (12.5)
50TI/35G120S/15F	0.7 (7.6)	0.8 (8.7)	1.4 (15.1)
85TIP/15F	2.1 (22.1)	2.3 (25.2)	4.0 (43.1)
65TISM/35G120S	1.5 (16.6)	1.8 (18.9)	3.0 (32.5)

Table 2—Contribution of Δ_{flex} , Δ_{slip} , and Δ_{shear} in total displacement, for varying reinforcement ratio

$P/A_g f'_c$	Contribution in total displacement, %				
		$\rho = 0.01$	$\rho = 0.02$	$\rho = 0.03$	
0	Δ_{flex}	69.9	69.6	69.3	69.0
	Δ_{slip}	29.2	29.0	28.9	28.8
	Δ_{shear}	0.9	1.4	1.8	2.2
0.1	Δ_{flex}	69.6	69.4	69.1	68.9
	Δ_{slip}	29.1	29.0	28.8	28.7
	Δ_{shear}	1.3	1.7	2.0	2.4
0.2	Δ_{flex}	69.4	69.2	69.0	68.8
	Δ_{slip}	29.0	28.9	28.8	28.7
	Δ_{shear}	1.6	1.9	2.2	2.5
0.3	Δ_{flex}	73.1	72.9	73.5	74.0
	Δ_{slip}	24.9	24.9	23.9	23.0
	Δ_{shear}	2.0	2.2	2.6	3.0
0.4	Δ_{flex}	80.8	79.6	79.2	78.1
	Δ_{slip}	16.4	17.5	17.6	18.5
	Δ_{shear}	2.8	2.9	3.2	3.4
0.5	Δ_{flex}	87.2	85.8	84.4	83.6
	Δ_{slip}	9.3	10.6	11.8	12.3
	Δ_{shear}	3.5	3.6	3.8	4.1
0.6	Δ_{flex}	93.0	91.3	89.1	87.6
	Δ_{slip}	2.9	4.4	6.5	7.8
	Δ_{shear}	4.1	4.3	4.4	4.6
0.7	Δ_{flex}	95.9	95.5	93.7	91.6
	Δ_{slip}	0.0	0.0	1.6	3.4
	Δ_{shear}	4.1	4.5	4.8	5.0
0.8	Δ_{flex}	96.4	95.9	95.3	94.8
	Δ_{slip}	0.0	0.0	0.0	0.0
	Δ_{shear}	3.6	4.1	4.7	5.2
0.9	Δ_{flex}	97.0	96.4	95.7	95.2
	Δ_{slip}	0.0	0.0	0.0	0.0
	Δ_{shear}	3.0	3.6	4.3	4.8
1	Δ_{flex}	97.6	97.0	96.2	95.6
	Δ_{slip}	0.0	0.0	0.0	0.0
	Δ_{shear}	2.4	3.0	3.8	4.4

EXAMPLES OF LARGE TABLES COUNTED AS TWO LARGE TABLES:

Table 1—Shear failure modes of RC beams

Beams	$\rho f_{yu}/f'_c$	F.M.	Beams	$\rho f_{yu}/f'_c$	F.M.	Beams	$\rho f_{yu}/f'_c$	F.M.	Beams	$\rho f_{yu}/f'_c$	F.M.
A1-1 ⁸⁾	0.051	U.R.	B15110 ⁹⁾	0.249	O.R.	ID-2R(20) ₁₆₎	0.038	U.R.	1-6 ²²⁾	0.031	U.R.
A1-2 ⁸⁾	0.053	U.R.	C205D10(1) ¹⁰⁾	0.029	U.R.	IA-2(2) ¹⁶⁾	0.071	U.R.	1-7 ²²⁾	0.129	U.R.
A1-3 ⁸⁾	0.054	U.R.	C205D20(2) ¹⁰⁾	0.027	U.R.	IC-2(5) ¹⁶⁾	0.038	U.R.	1-8 ²²⁾	0.041	U.R.
A1-4 ⁸⁾	0.051	U.R.	C210DOA(3) ¹⁰⁾	0.049	U.R.	IIA-2(9) ¹⁶⁾	0.071	U.R.	1-9 ²²⁾	0.168	O.R.
B1-1 ⁸⁾	0.052	U.R.	C305DO(5) ¹⁰⁾	0.026	U.R.	IIB-2(10) ¹⁶⁾	0.077	U.R.	1-10 ²²⁾	0.242	O.R.
B1-2 ⁸⁾	0.048	U.R.	1-V1/4(1) ¹¹⁾	0.043	U.R.	IIC-2(12) ¹⁶⁾	0.034	U.R.	1-11 ²²⁾	0.243	O.R.
B1-3 ⁸⁾	0.051	U.R.	2-V1/4(2) ¹¹⁾	0.031	U.R.	IID-2(13) ¹⁶⁾	0.034	U.R.	1-12 ²²⁾	0.566	O.R.
B1-4 ⁸⁾	0.052	U.R.	2-V3/8(8) ¹¹⁾	0.032	U.R.	210-19 ¹⁷⁾	0.057	U.R.	3-2 ²²⁾	0.023	U.R.
B1-5 ⁸⁾	0.049	U.R.	1a-V1/4(13) ¹¹⁾	0.036	U.R.	210-40 ¹⁷⁾	0.119	U.R.	3-4 ²²⁾	0.031	U.R.
B2-1 ⁸⁾	0.105	U.R.	1a-V3/8(14) ¹¹⁾	0.043	U.R.	210-59 ¹⁷⁾	0.186	O.R.	A2 ²³⁾	0.023	U.R.
C1-3 ⁸⁾	0.048	U.R.	S21-40 ¹²⁾	0.165	O.R.	210-89 ¹⁷⁾	0.280	O.R.	A3 ²³⁾	0.048	U.R.
C3-1 ⁸⁾	0.081	U.R.	S21-59 ¹²⁾	0.245	O.R.	210-118 ¹⁷⁾	0.372	O.R.	A4 ²³⁾	0.095	U.R.
C3-2 ⁸⁾	0.083	U.R.	S21-89 ¹²⁾	0.337	O.R.	360-19 ¹⁷⁾	0.035	U.R.	A5 ²³⁾	0.165	U.R.
C3-3 ⁸⁾	0.082	U.R.	S36-40 ¹²⁾	0.119	O.R.	360-89 ¹⁷⁾	0.175	O.R.	B3 ²³⁾	0.052	U.R.
C4-1 ⁸⁾	0.047	U.R.	S36-59 ¹²⁾	0.153	O.R.	360-118 ¹⁷⁾	0.232	O.R.	C2 ²³⁾	0.024	U.R.
D1-6 ⁸⁾	0.055	U.R.	S36-89 ¹²⁾	0.257	O.R.	570-89 ¹⁷⁾	0.041	U.R.	E2 ²³⁾	0.044	U.R.
D1-7 ⁸⁾	0.054	U.R.	B21060 ¹³⁾	0.201	O.R.	B90-041 ¹⁸⁾	0.099	U.R.	E3 ²³⁾	0.106	U.R.
D1-8 ⁸⁾	0.055	U.R.	B21074 ¹³⁾	0.304	O.R.	E30-041 ¹⁸⁾	0.024	U.R.	E4 ²³⁾	0.203	U.R.
D2-6 ⁸⁾	0.069	U.R.	B21092 ¹³⁾	0.483	O.R.	G30-041 ¹⁸⁾	0.024	U.R.	E5 ²³⁾	0.254	U.R.
D2-7 ⁸⁾	0.071	U.R.	B21011 ¹³⁾	0.695	O.R.	B-1 ¹⁹⁾	0.021	U.R.	G3 ²³⁾	0.073	U.R.
D2-8 ⁸⁾	0.078	U.R.	B36041 ¹³⁾	0.059	U.R.	B-2 ¹⁹⁾	0.140	U.R.	G4 ²³⁾	0.107	U.R.
D4-1 ⁸⁾	0.059	U.R.	B36051 ¹³⁾	0.093	U.R.	B-3 ¹⁹⁾	0.018	U.R.	G5 ²³⁾	0.183	U.R.
D4-2 ⁸⁾	0.063	U.R.	B36060 ¹³⁾	0.117	U.R.	B-4 ¹⁹⁾	0.016	U.R.	H2 ²³⁾	0.051	U.R.
D4-3 ⁸⁾	0.073	U.R.	B36074 ¹³⁾	0.177	O.R.	B-5 ¹⁹⁾	0.122	U.R.	J3 ²⁴⁾	0.047	U.R.
D5-1 ⁸⁾	0.044	U.R.	B36092 ¹³⁾	0.282	O.R.	B-1 ²⁰⁾	0.029	U.R.	J5 ²⁴⁾	0.133	U.R.
D5-2 ⁸⁾	0.042	U.R.	B36011 ¹³⁾	0.406	O.R.	B-4 ²⁰⁾	0.117	O.R.	T4 ²⁴⁾	0.017	U.R.
D5-3 ⁸⁾	0.045	U.R.	B57041 ¹³⁾	0.037	U.R.	B-5 ²⁰⁾	0.285	O.R.	T6 ²⁴⁾	0.087	U.R.
B30046 ⁹⁾	0.048	U.R.	B57060 ¹³⁾	0.074	U.R.	B-6 ²⁰⁾	0.032	U.R.	T7 ²⁴⁾	0.021	U.R.
B30121 ⁹⁾	0.107	U.R.	B57074 ¹³⁾	0.112	U.R.	B-7 ²⁰⁾	0.098	U.R.	T8 ²⁴⁾	0.018	U.R.
B60030 ⁹⁾	0.044	U.R.	B57092 ¹³⁾	0.178	O.R.	SH-1 ²¹⁾	0.034	U.R.	T9 ²⁴⁾	0.057	U.R.
B60059 ⁹⁾	0.099	U.R.	R8 ¹⁴⁾	0.021	U.R.	SH-2 ²¹⁾	0.068	O.R.	T10 ²⁴⁾	0.013	U.R.
B80019 ⁹⁾	0.050	U.R.	R11 ¹⁴⁾	0.022	U.R.	SH-3 ²¹⁾	0.102	O.R.	T11 ²⁴⁾	0.031	U.R.
B80022 ⁹⁾	0.054	U.R.	R12 ¹⁴⁾	0.017	U.R.	SH-4 ²¹⁾	0.128	O.R.	T12 ²⁴⁾	0.019	U.R.
B80046 ⁹⁾	0.122	U.R.	R14 ¹⁴⁾	0.013	U.R.	2-3 ²²⁾	0.022	U.R.	T13 ²⁴⁾	0.044	U.R.
B80058 ⁹⁾	0.145	U.R.	R15 ¹⁴⁾	0.038	U.R.	2-4 ²²⁾	0.022	U.R.	T14 ²⁴⁾	0.067	U.R.
B80059 ⁹⁾	0.157	U.R.	R16 ¹⁴⁾	0.036	U.R.	2-5 ²²⁾	0.117	U.R.	T15 ²⁴⁾	0.017	U.R.
B80110 ⁹⁾	0.261	O.R.	R24 ¹⁴⁾	0.018	U.R.	2-6 ²²⁾	0.117	U.R.	T16 ²⁴⁾	0.012	U.R.
B80121 ⁹⁾	0.321	O.R.	R25 ¹⁴⁾	0.018	U.R.	2-7 ²²⁾	0.044	U.R.	T19 ²⁴⁾	0.019	U.R.
B120019 ⁹⁾	0.059	U.R.	R28 ¹⁴⁾	0.071	U.R.	2-8 ²²⁾	0.044	U.R.	T32 ²⁴⁾	0.081	U.R.
B120030 ⁹⁾	0.090	U.R.	C4S2.0 ¹⁵⁾	0.027	U.R.	2-11 ²²⁾	0.060	U.R.	T34 ²⁴⁾	0.017	U.R.
B120059 ⁹⁾	0.180	O.R.	C4S3.0 ¹⁵⁾	0.018	U.R.	2-13 ²²⁾	0.091	U.R.	T35 ²⁴⁾	0.017	U.R.
B120121 ⁹⁾	0.370	O.R.	C4S3.5 ¹⁵⁾	0.018	U.R.	2-15 ²²⁾	0.061	U.R.	T36 ²⁴⁾	0.048	U.R.
B15019 ⁹⁾	0.068	U.R.	C4S4.0 ¹⁵⁾	0.018	U.R.	1-2 ²²⁾	0.023	U.R.	T37 ²⁴⁾	0.070	U.R.
B15022 ⁹⁾	0.052	U.R.	IA-2R(17) ¹⁶⁾	0.071	U.R.	1-3 ²²⁾	0.094	U.R.			
B15058 ⁹⁾	0.137	U.R.	IC-2R(19) ¹⁶⁾	0.038	U.R.	1-4 ²²⁾	0.094	U.R.			

Note: F.M. is failure modes; U.R. is under-reinforced shear failure; and O.R. is over-reinforced shear failure.

Table 1—Test results

Specimen ID	$\frac{c}{d_b}$	$\frac{A_{tr}}{ns_{tr}d_b}$	f'_c , MPa (ksi)	Failure mode*	P_e , kN (kip)	$f_{sc,e}$, MPa (ksi)	$f_{brg,e}$, MPa (ksi)	$f_{b,e}$, MPa (ksi)
D22C40-series	0.75	0	48.9 (7.09)	FS	2404 (540)	399 (57.9)	NA	NA
			48.9 (7.09)	FS	2835 (637)	407 (59.0)	127 (18.4)	280 (40.6)
		0.015	48.9 (7.09)	PS+Ec	2587 (582)	337 (48.9)	128 (18.6)	209 (30.3)
			48.9 (7.09)	PS+Ec	2886 (649)	365 (52.9)	131 (19.0)	234 (33.9)
		0.044	48.9 (7.09)	PS+En	2791 (627)	465 (67.4)	141 (20.4)	325 (47.1)
			48.9 (7.09)	PS+En	2982 (670)	423 (61.3)	133 (19.3)	291 (42.2)
	1.25	0	48.9 (7.09)	Ec	2832 (637)	307 (44.5)	111 (16.1)	196 (28.4)
			48.9 (7.09)	PS	2920 (656)	322 (46.7)	85 (12.3)	237 (34.4)
		0.015	48.9 (7.09)	PS	2947 (662)	386 (56.0)	130 (18.9)	256 (37.1)
			48.9 (7.09)	PS+Ec	3115 (700)	415 (60.2)	140 (20.3)	275 (39.9)
		0.044	48.9 (7.09)	PS+En	2852 (641)	423 (61.3)	114 (16.5)	309 (44.8)
			48.9 (7.09)	FS	3090 (695)	457 (66.3)	NA	NA
D22C60-series	1.50	0	48.9 (7.09)	PS	3183 (716)	325 (47.1)	127 (18.4)	198 (28.7)
			48.9 (7.09)	PS	3126 (703)	315 (45.7)	117 (17.0)	197 (28.6)
		0.015	48.9 (7.09)	PS+Ec	3218 (723)	341 (49.4)	112 (16.2)	228 (33.1)
			48.9 (7.09)	FS	3423 (769)	382 (55.4)	121 (17.5)	262 (38.0)
		0.044	48.9 (7.09)	PS+C	3218 (723)	381 (55.2)	121 (17.5)	261 (37.8)
			48.9 (7.09)	PS+C	3482 (783)	454 (65.8)	133 (19.3)	321 (46.5)
	1.25	0	70.2 (10.2)	PS+Ec	3357 (755)	486 (70.5)	125 (18.1)	361 (52.3)
			70.0 (10.2)	PS	3388 (762)	469 (68.0)	148 (21.5)	321 (46.5)
		0.015	70.2 (10.2)	PS+Ec	3348 (753)	487 (70.6)	209 (30.3)	279 (40.5)
			70.0 (10.2)	PS+Ec	3577 (804)	452 (65.5)	151 (21.9)	301 (43.6)
		0.044	70.2 (10.2)	Ec+En	3156 (709)	449 (65.1)	133 (19.3)	316 (45.8)
			70.0 (10.2)	En	3164 (711)	463 (67.1)	NA	NA
D29C40-series	1.50	0	70.1 (10.2)	FS	3667 (824)	443 (64.2)	139 (20.2)	304 (44.1)
			69.9 (10.1)	FS	3853 (866)	496 (71.9)	150 (21.8)	345 (50.0)
		0.015	70.1 (10.2)	FS	3649 (820)	455 (66.0)	144 (20.9)	310 (45.0)
			70.0 (10.2)	FS	3820 (859)	502 (72.8)	123 (17.8)	379 (55.0)
		0.044	70.1 (10.2)	En	3525 (792)	453 (65.7)	117 (17.0)	336 (48.7)
			70.0 (10.2)	Ec	3455 (777)	417 (60.5)	122 (17.7)	295 (42.8)
	0.75	0	68.5 (9.9)	PS+Ec	3920 (881)	424 (61.5)	112 (16.2)	312 (45.2)
			69.9 (10.1)	FS	4227 (950)	504 (73.1)	141 (20.4)	364 (52.8)
		0.015	70.1 (10.2)	PS+C	3847 (865)	514 (74.5)	131 (19.0)	383 (55.5)
			71.4 (10.4)	Ec	4051 (911)	426 (61.8)	125 (18.1)	300 (43.5)
		0.044	70.1 (10.2)	Ec	3802 (855)	466 (67.6)	134 (19.4)	332 (48.1)
			71.4 (10.4)	Ec	4157 (934)	478 (69.3)	131 (19.0)	347 (50.3)
D29C60-series	0.75	0	54.4 (7.89)	FS+C	3784 (851)	471 (68.3)	121 (17.5)	350 (50.8)
			64.5 (9.35)	FS	3577 (804)	435 (63.1)	159 (23.1)	277 (40.2)
		0.008	54.4 (7.89)	PS+Ec	3727 (838)	463 (67.1)	155 (22.5)	309 (44.8)
			64.7 (9.38)	Ec	3321 (747)	392 (56.8)	114 (16.5)	278 (40.3)
		0.025	55.4 (8.03)	En	3657 (822)	388 (56.3)	132 (19.1)	256 (37.1)
			64.5 (9.35)	PS+Ec	3414 (767)	455 (66.0)	125 (18.1)	330 (47.9)
	0.75	0	71.9 (10.4)	FS	4193 (943)	461 (66.8)	150 (21.8)	311 (45.1)
			73.7 (10.7)	PS+En	3776 (849)	436 (63.2)	136 (19.7)	300 (43.5)
		0.008	72.1 (10.5)	FS	3840 (863)	471 (68.3)	172 (24.9)	300 (43.5)
			73.7 (10.7)	FS	3713 (835)	451 (65.4)	132 (19.1)	319 (46.3)
		0.025	72.1 (10.5)	Ec	3793 (853)	448 (65.0)	142 (20.6)	306 (44.4)
			73.7 (10.7)	Ec	3799 (854)	449 (65.1)	142 (20.6)	307 (44.5)

*C is compression failure; FS is fully splitting failure; PS is partial splitting failure; Ec is premature failure due to eccentricity; and En is premature failure due to end failure.

EXAMPLES OF SMALL FIGURES:


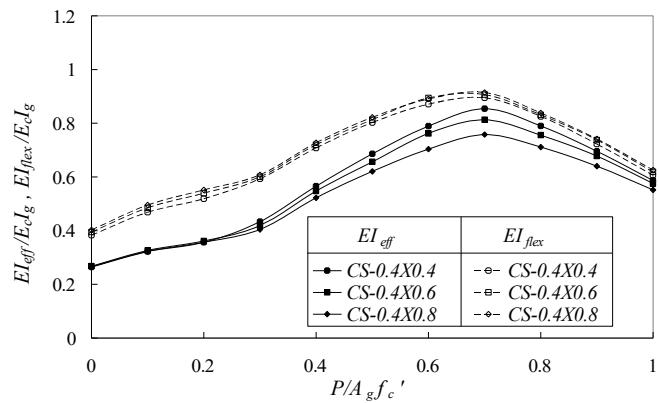


Fig. 1—Variation of flexural and effective stiffness ratios with axial load ratio for different depths of member. (Note: CS denotes cross section size in m; 1 m = 39.37 in.)



a) Beam B18-0a (regular concrete and no stirrups)

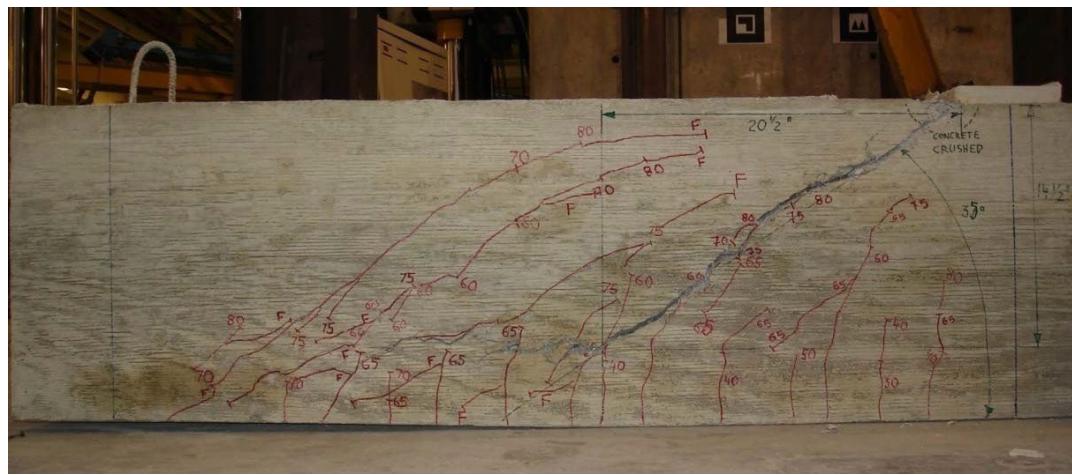

b) Beam B18-1a (SFRC with 0.75% volume fraction of Type 1 fibers)

Fig. 2—Cracking pattern in RC versus SFRC beams.

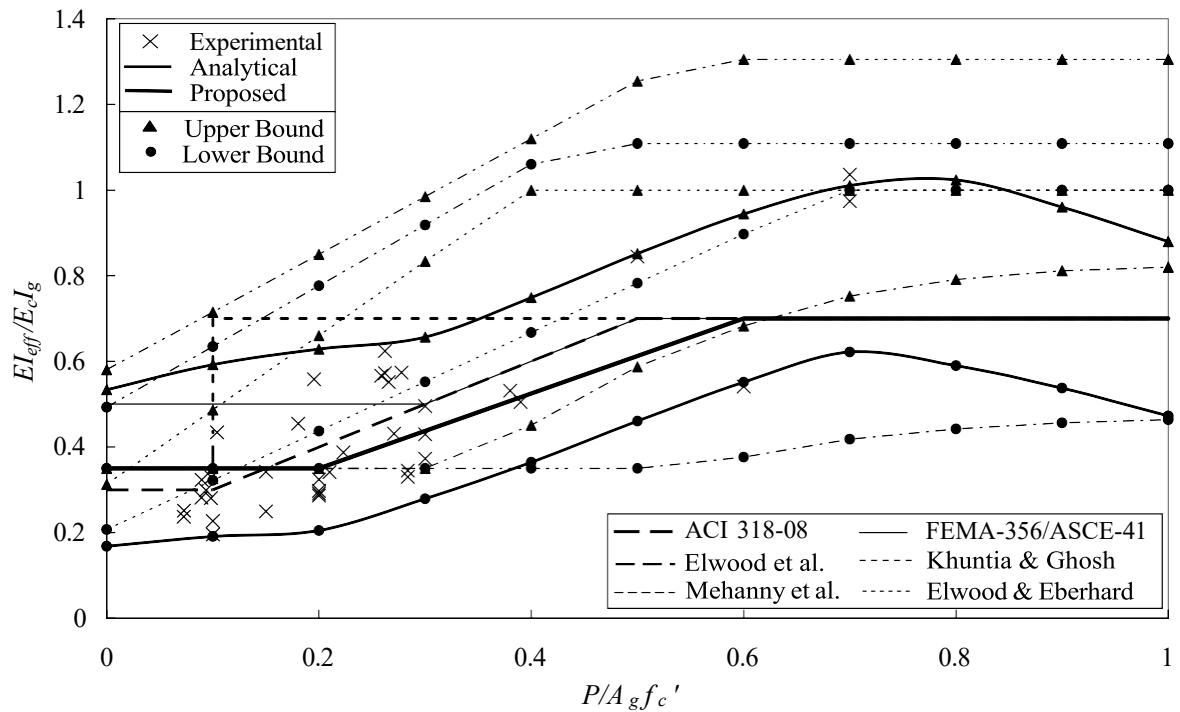


Fig. 3—Comparison of different models of effective stiffness with analytical and experimental estimates for normal strength concrete.

EXAMPLES OF LARGE FIGURES:

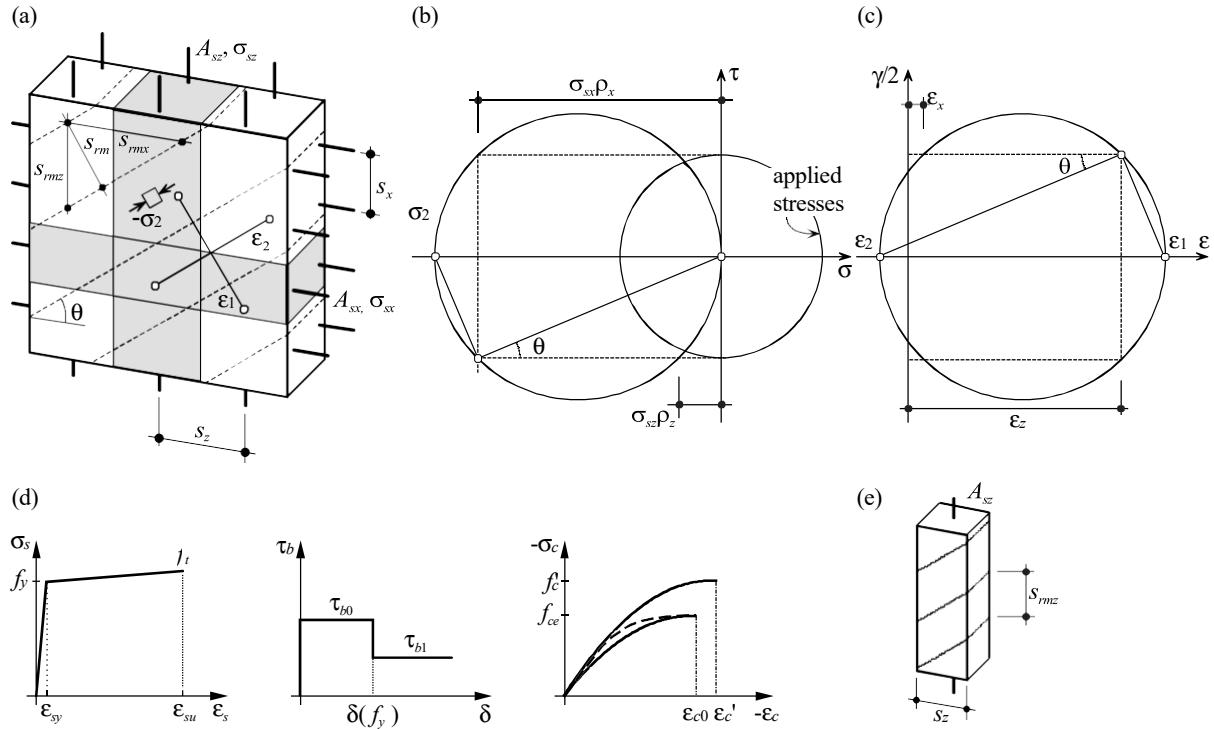


Fig. 2—Cracked membrane in pure shear: (a) stresses in concrete and steel; (b) Mohr's circle of stresses and (c) strains; (d) constitutive laws for steel, bond shear stress-slip and concrete; and (e) equivalent tension chord with stirrup reinforcement.

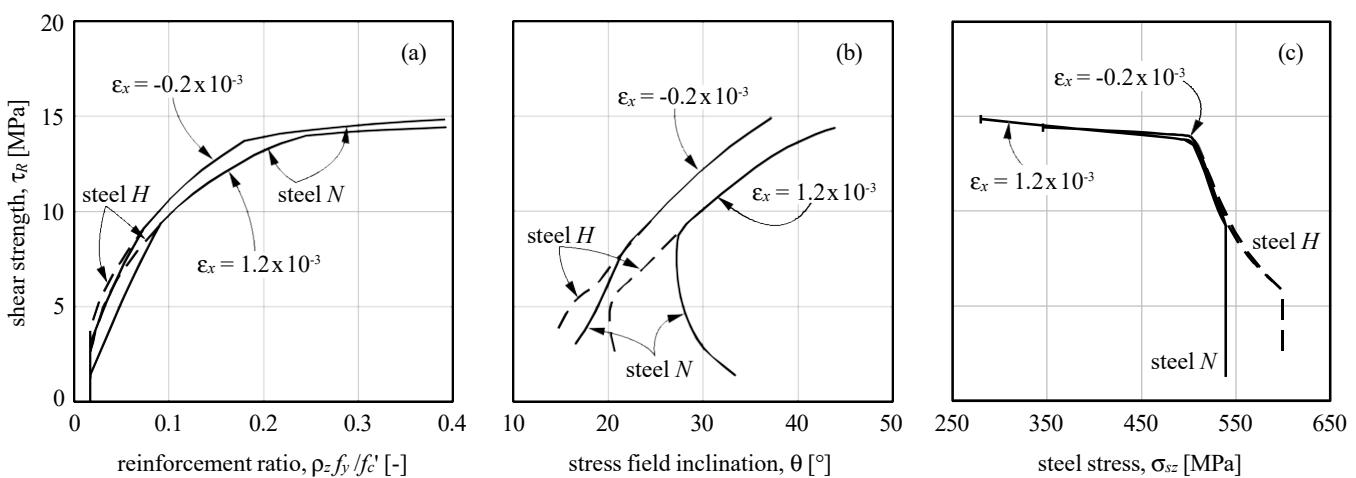


Fig. 3—Results for membrane elements with $f'_c = 50$ MPa and $f_y = 500$ MPa, longitudinal strains

$\varepsilon_x = -0.2 \times 10^{-3}$ and 1.2×10^{-3} and reinforcing steel N and H with $f_t/f_y = 1.08$ and 1.2 and $\varepsilon_{su} = 0.05$ and 0.10. (Note: 1 MPa = 145 psi.)

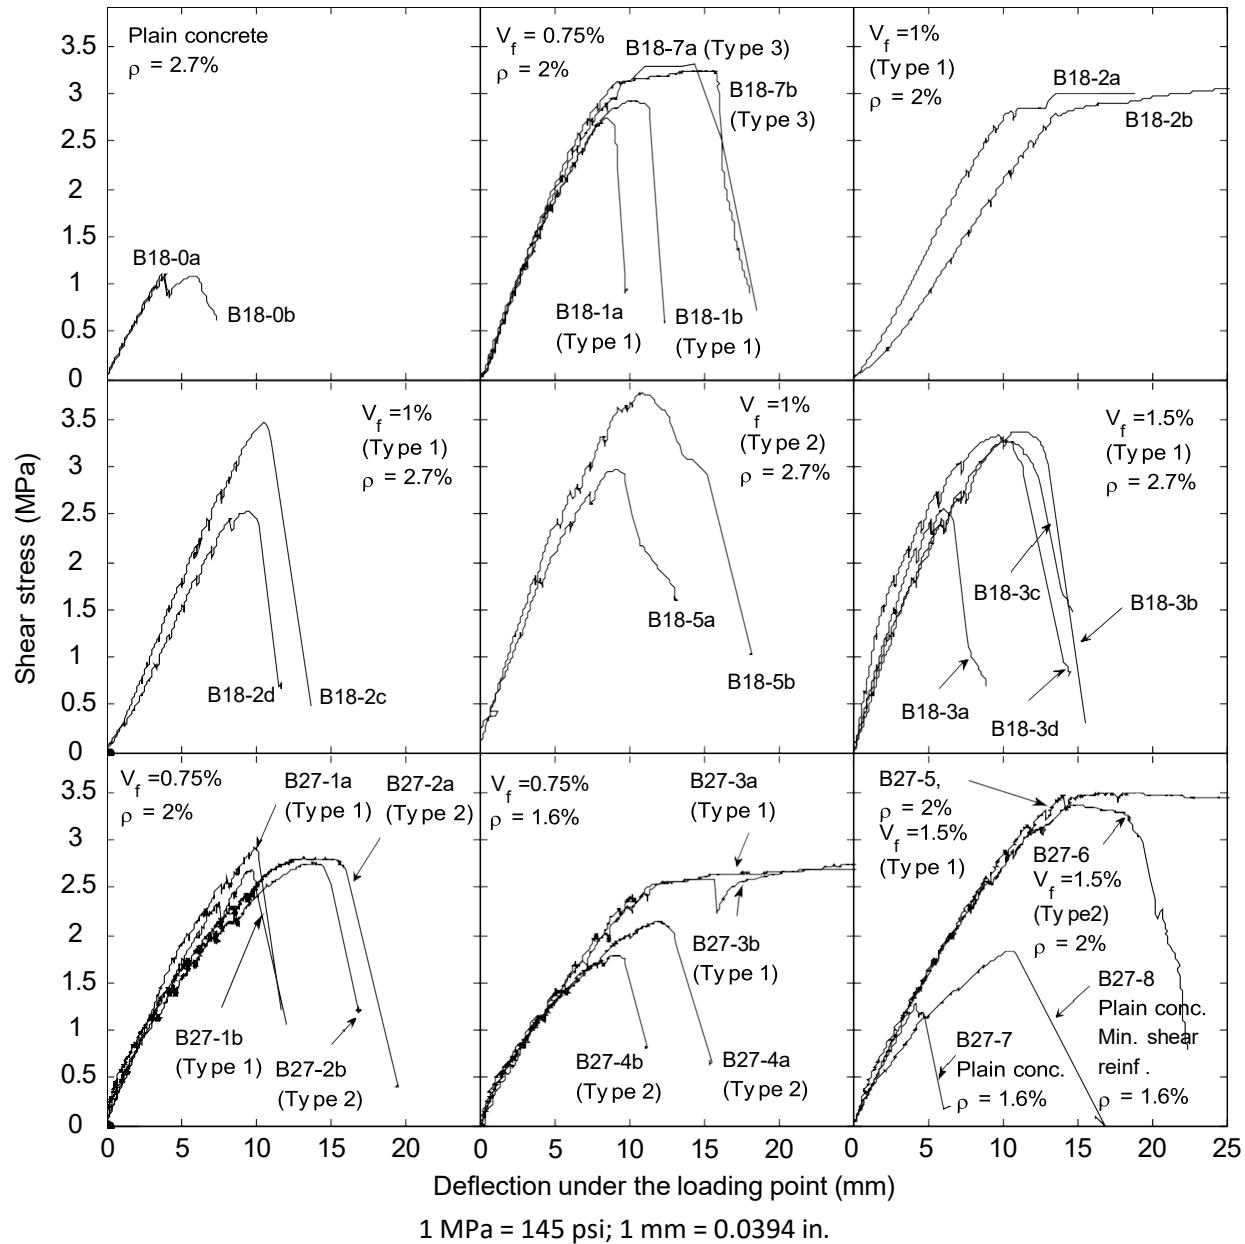


Fig. 1—Average shear stress versus displacement response.

EXAMPLES OF FIGURES COUNTED AS TWO LARGE FIGURES:



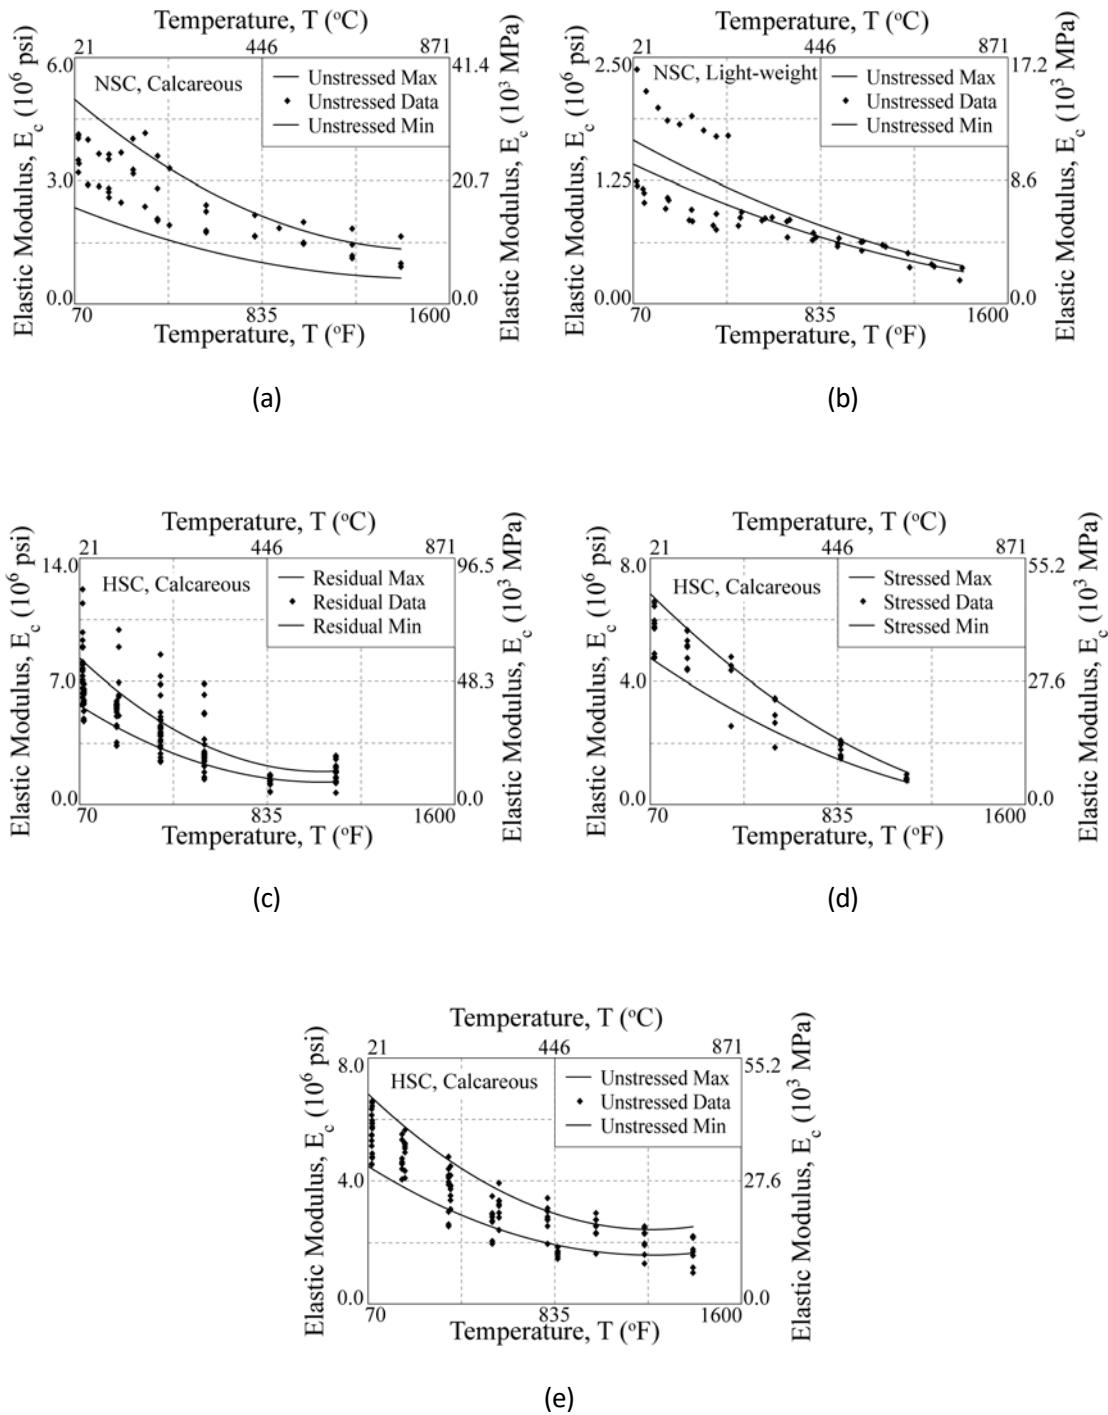



Fig. 1—Proposed E_c model prediction bands: (a) NSC, calcareous, unstressed; (b) NSC, lightweight, unstressed; (c) HSC, calcareous, residual; (d) HSC, calcareous, stressed; and (e) HSC, calcareous, unstressed.

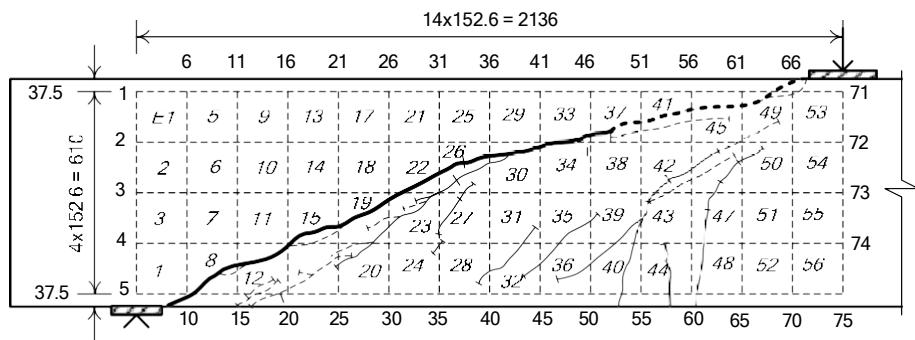


a) Element and marker numbering

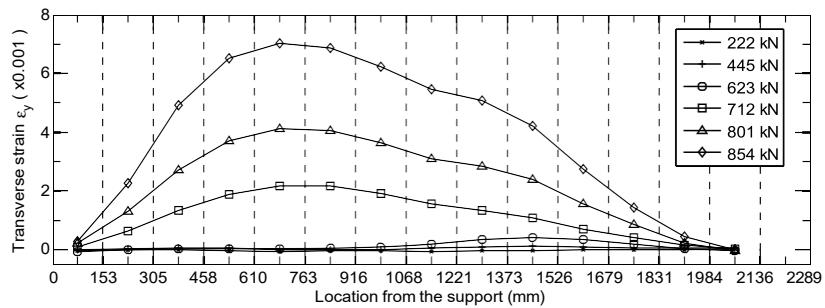

b) Vertical strains at various loads, averaged over beam depth

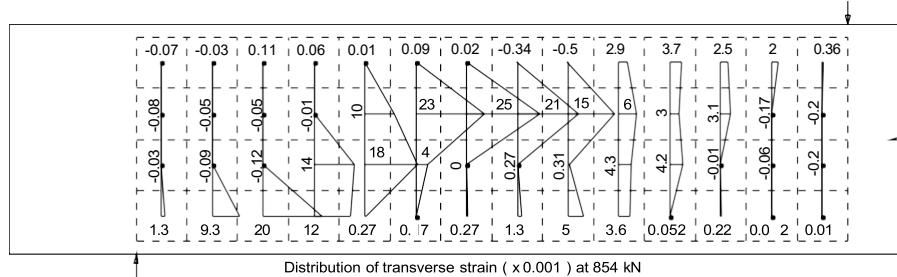

c) Distribution of vertical strains at peak load

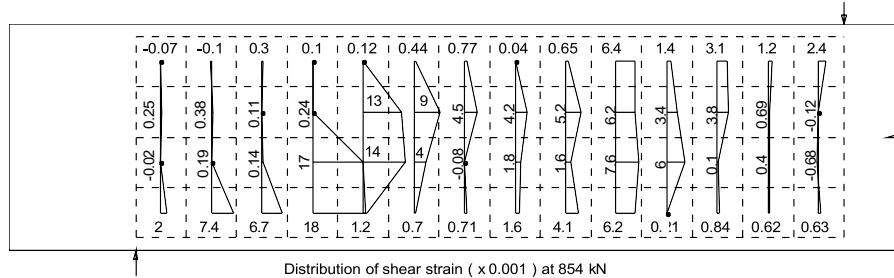

d) Distribution of shear strains at peak load

1 kN = 0.225 kip; 1 mm = 0.0394 in.

Fig. 2—Strain distribution for Beam B27-2b.

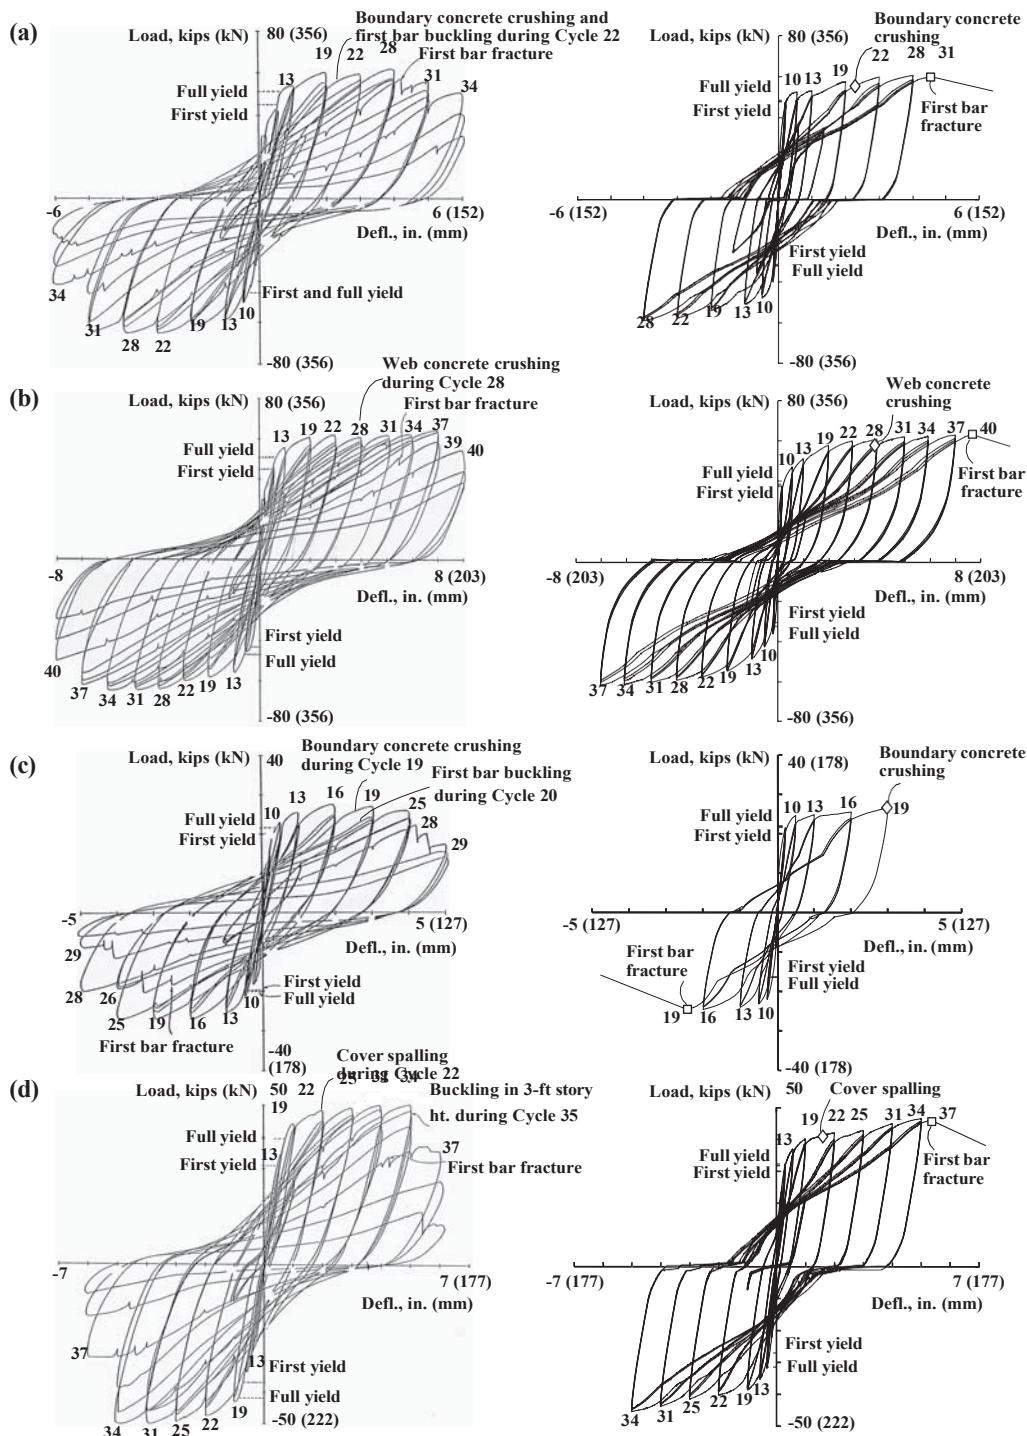


Fig. 2—Estimated (right) and measured (left, from Oesterle et al. 1976, 1979) lateral load versus deflection behaviors: (a) Wall B1; (b) Wall B3; (c) Wall R1; and (d) Wall R2.